

OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase-livingwater.com
 www.oase-livingwater.com

Aquarius Universal 5000





56617

	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz
Aquarius Universal 5000								




Product characteristics at a glance

- Extremely quiet operation
- Easy adjustment of the flow rate
- Integrated thermal protection-from 600 onwards
- Can be used underwater or dry installations
- Energy-efficient thanks to low energy consumption
- Frost-resistant to -20° C
- High-quality workmanship with stainless steel
- Removable pedestal for installation where space is at a premium
- Electronic adjustment

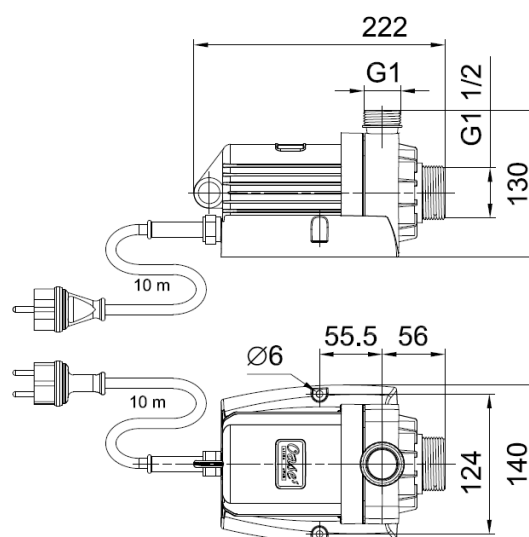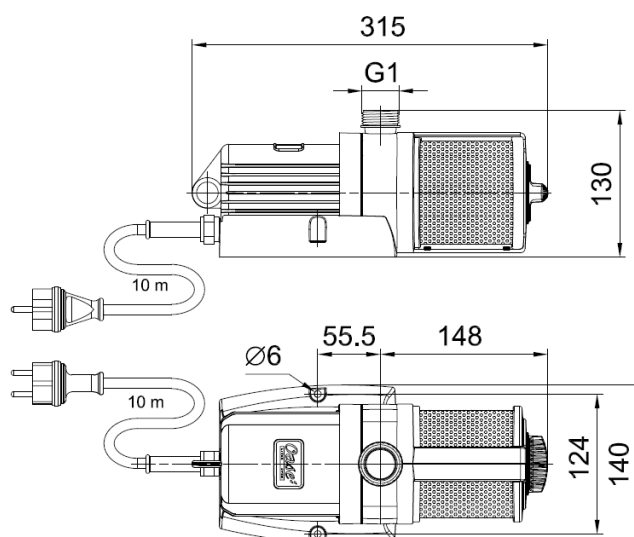

		Aquarius Universal 5000
Dimensions (LxWxH)	[mm]	315x140x130
Rated voltage	[V/Hz]	220-240/50
Power consumption	[Watt]	85
Nominal current	[A]	0.42
Flow rate max.	[L/min]	83
Flow rate max.	[L/h]	5000
Head height max.	[m]	9,6
Hose connection	[inch]	1,1 1/4,1 1/2
Pressure side connection	[inch]	1
Suction side connection	[inch]	1 1/2
Filter surface	[cm ²]	200
Weight	[kg]	3.42
Cable length	[m]	10
Order no.		56617

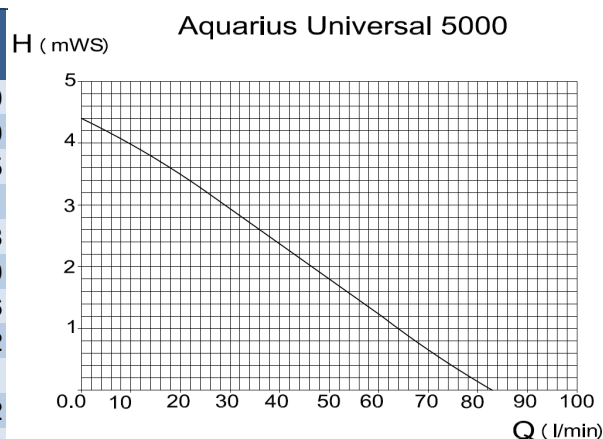

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.